




FOSSIL




GRANITE MIST

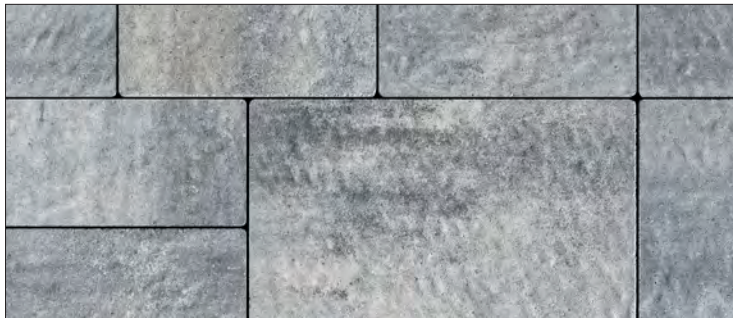

MIDNIGHT CHARCOAL

6 x 12 only

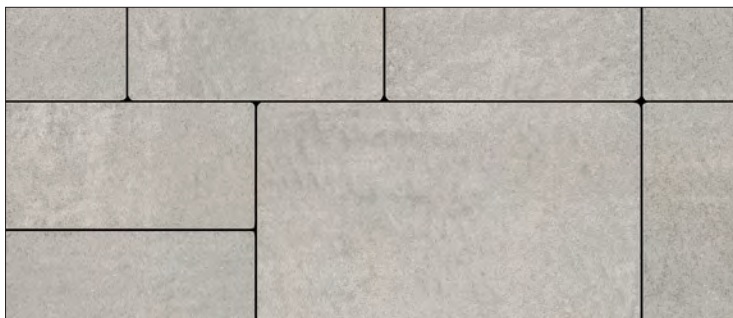

STERLING **NEW**

VISUAL APPEARANCE

Gentle surface clefts and waved edges.

FINISH

NEW Comfort Step finish - ultra smooth surface texture, sealed with EasyClean™ to provide integral surface protection from stains and the refined surface and long-lasting colour benefits of EnduraColor™.

PRODUCT SPECIFICATIONS



LARGE RECTANGLE

12 x 18 x 2¾"

300 x 457 x 70mm



SQUARE

12 x 12 x 2¾"

300 x 300 x 70mm



SMALL RECTANGLE

6 x 12 x 2¾"

150 x 300 x 70mm



SMALL RECTANGLE

6 x 12 x 2¾"

150 x 300 x 70mm

Midnight Charcoal only


3 UNIT RANDOM BUNDLE

EDGE DETAILS





WAVED EDGE

LAYER CONFIGURATION



LAYING PATTERNS



*Colour selection should be chosen from actual samples.

TECHNICAL INFORMATION

ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units

Conforms to:

- C140 for Absorption 5% avg - 7% max
- Compressive Strength > 7,200 PSI avg.
- C67 for Freeze-thaw Durability
- C418 for Abrasion Durability
- Dimensional Accuracy **+/- 3mm**

Test results available upon request

Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines

LEED INFORMATION

Materials & Resources: LEED V4:

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • **1 point**
- Sourcing of Raw Materials - Leadership Extraction Practices • **1 point**
- Material Ingredient Reporting - Material Ingredient Reporting • **1 point**
- Material Ingredient Reporting - Material Ingredient Optimization • **1 point**
- Environmental Product Declaration • **1 point**

TECHNICAL ADVANTAGES

ENDURACOLOR™

Refined surface and long-lasting colour



Refined surface and long-lasting colour



Ultra-smooth surface texture

DRIVE FRIENDLY

Can handle vehicular loads

Ask about our base stabilization system

PRODUCT DATA

Stones & Bundling	Unit Thickness	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per	
		Bundle	Layer	Section	Stone	Layers	Sections	Unit	Layer	Bundle	Unit	Layer	Bundle	SqFt	Layer	Bundle	Layer	Bundle
Georgetown Manufacturing																		
Random Bundle	2 3/4" (70mm)	93.0	11.625	-	-	8	-	-	-	-	-	11.81	94.48	1.03	12	96	372.33	2,978.63
Large Rectangle	2 3/4" (70mm)	-	-	-	2.09	-	-	-	-	-	1.47	-	47.04	0.69	4	32	-	-
Square	2 3/4" (70mm)	-	-	-	0.97	-	-	-	-	-	0.98	-	31.36	1.02	4	32	-	-
Small Rectangle	2 3/4" (70mm)	77.52	9.69	-	0.48	8	-	-	-	-	0.98	-	15.68	2.08	4	32	368.75	2,950
Small Rectangle	2 3/4" (70mm)	77.52	9.69	-	0.48	8	-	0.49	9.84	78.74	0.98	19.69	157.48	2.06	4	160	318.73	2,549.84

Notes: Sold in full bundles only on a refundable skid. **Minimum quantities apply on custom orders.** All measurements are nominal. **Important: A urethane rubber paver mat must be used to prevent scuffing.** For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

APPLICATIONS



Pedestrian



Residential Vehicular



Commercial Vehicular
(Small Rectangle only)



*Wall pairing suggestion- U-CARA™

RECOMMENDED SANDS

RECOMMENDED SEALER



+



Romex: Rompox® Fugensand
Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- | Manufactured from natural, raw materials
- | Quick application
- | Self-repairing properties
- | Suitable for all load classes
- | No cement haze/residue due to natural polymer binder
- | Three colours: Natural, Stone Grey and Basalt

Romex: Rompox® D7000 Joint Strengtheners & Surface Sealer
Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- | All-in-one strengthener & sealer
- | Eco-Friendly
- | Protects against dirt, oil, corrosion from climate exposure, de-icing salts
- | Protects against weed growth and wash outs

Alliance Gator G2 MAXX Sand

- | Rain safe after 15 minutes (24hr no rain if concrete overlay)
- | Sets above 32° F/ 0° C - may vary depending on weather, drainage, bedding materials and installation
- | Dust free and haze free
- | Requires only one watering
- | Four colours: Beige, Grey, Black and Ivory

Alliance Gator Natural Look Sealer

- | Water-based
- | Zero gloss finish
- | Multi purpose
- | Rain safe after 24 hours

Coverage:

Colour	3mm Joints
Neutral, Stone Grey, Basalt <i>1 L / 5 gal</i>	110 sqft / 55 lb bag 750 sqft / 5 gal drum

Coverage:

Colour	3mm Joints
Neutral, Stone Grey, Basalt <i>55 lb bag / 1 kg can</i>	110 sqft / 55 lb bag 750 sqft / 5 gal drum

Coverage:

Colour	Narrow Joints	Wide Joints
Beige, Grey, Ivory <i>50 lb bag</i>	65-85 sqft	22-42 sqft
Black <i>50 lb bag</i>	58-76 sqft	20-38 sqft

Coverage:

Size	Area
3.78 L / 1 U.S. gal.	175 sqft
18.9 L / 5.28 U.S. gal.	875 sqft

*Please refer to Sands & Sealers on pages 190-202 for more detailed information.

Unsure of bonded vs. unbonded product recommendations? Please contact your Unilock Territory Manager for more information.