


# IL CAMPO<sup>®</sup>

Exclusive to **UNILOCK**

## ENDURACOLOR™

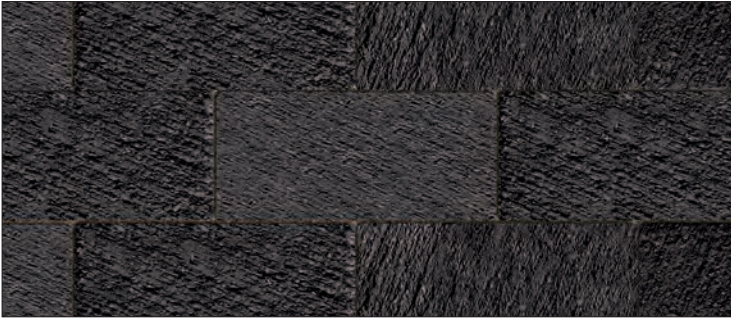

DARK CHARCOAL



GRANITE BLEND



LIGHT GREY



SANDSTONE

### VISUAL APPEARANCE

The detailed look that is striking and inviting at the same time, and unlike any other paver you can buy.

### FINISH

Created with technology that is exclusive to Unilock, the etched lines on the surface of Il Campo<sup>®</sup> make it a richly detailed, striking choice for virtually any application.

### PRODUCT SPECIFICATIONS



4 x 8 x 2<sup>3</sup>/<sub>4</sub>"  
100 x 200 x 70mm  
*Dark Charcoal only*



7 x 14 x 3<sup>1</sup>/<sub>8</sub>"  
180 x 360 x 80mm  
*Dark Charcoal only*




8 x 16 x 2<sup>3</sup>/<sub>4</sub>"  
200 x 400 x 70mm  
*All Colours*

### EDGE DETAILS




WAVED EDGE

### LAYING PATTERNS



IL CAMPO E  
100% 8x16



IL CAMPO F  
100% 4x8

\*Colour selection should be chosen from actual samples.

**TECHNICAL INFORMATION**

**ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units**



Conforms to:

- C140 for Absorption 5% avg - 7% max
- Compressive Strength > 7,200 PSI avg.
- C67 for Freeze-thaw Durability
- C418 for Abrasion Durability
- Dimensional Accuracy **+/- 3mm**

Test results available upon request

**Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines**

**SOLAR REFLECTIVE INDEX (SRI) TESTING DETAILS**

Product	Solar Reflectance	SRI
Light Grey	0.22	32 
Sandstone	0.2	19 

**TECHNICAL ADVANTAGES**

**ENDURACOLOR™**

Refined surface and long-lasting colour

**DRIVE FRIENDLY**

Can handle vehicular loads  
Ask about our base stabilization system

**BRUSHED FINISH**

Graphically interesting etched lines

**LEED INFORMATION**

**Materials & Resources: LEED V4:**

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • **1 point**
- Sourcing of Raw Materials - Leadership Extraction Practices • **1 point**
- Material Ingredient Reporting - Material Ingredient Reporting • **1 point**
- Material Ingredient Reporting - Material Ingredient Optimization • **1 point**
- Environmental Product Declaration • **1 point**

**PRODUCT DATA**

Stones & Bundling	Unit Thickness	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
		Bundle	Layer	Section	Stone	Layers	Sections	Unit	Layer	Bundle	Unit	Layer	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
<b>80mm - Georgetown Manufacturing; 70mm Pickering Manufacturing</b>																			
4" x 8"	2¾" (70mm)	94.40	11.80	-	0.22	8	-	0.33	-	141.80	0.67	-	283.60	4.57	-	432	377	-	3,021
7" x 14"	3 1/8" (80mm)	73.24	10.46	-	0.70	7	-	0.85	-	62.01	1.69	-	124.02	1.43	-	105	382.85	-	2,679.98
8" x 16"	2¾" (70mm)	82.67	10.33	-	0.86	8	-	0.66	-	62.99	1.33	-	125.99	1.16	-	96	343.29	-	2,746.30

Notes: Il Campo is sold in full bundles only on a refundable skid. All measurements are nominal. **Important: A urethane rubber mat must be used to prevent scuffing.** For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

**APPLICATIONS**

-  Pedestrian
-  Residential Vehicular
-  Commercial Vehicular
-  Borders and Accents
-  Roof Decks
-  \*Wall pairing suggestion- U-CARA® Wall or LIneo™ Dimensional Stone

**RECOMMENDED SANDS**

**RECOMMENDED SEALER**



**Romex: Rompox® Fugensand**  
Suitable for Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- | Manufactured from natural, raw materials
- | Quick application
- | Self-repairing properties
- | Suitable for all load classes
- | No cement haze/residue due to natural polymer binder
- | Three colours: Natural, Stone Grey and Basalt

**Coverage:**

Colour	3mm Joints
Neutral, Stone Grey, Basalt 1 L / 5 gal	110 sqft / 55 lb bag 750 sqft/ 5 gal drum

**Romex: Rompox® D7000 Joint Strengthener & Surface Sealer**  
Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- | All-in-one strengthener & sealer
- | Eco-Friendly
- | Protects against dirt, oil, corrosion from climate exposure, de-icing salts
- | Protects against weed growth and wash outs

**Coverage:**

Colour	3mm Joints
Neutral, Stone Grey, Basalt 55 lb bag / 1 kg can	110 sqft / 55 lb bag 750 sqft/ 5 gal drum

**Alliance Gator G2 MAXX Sand**

- | Rain safe after 15 minutes (24hr no rain if concrete overlay)
- | Sets above 32° F/ 0° C - may vary depending on weather, drainage, bedding materials and installation
- | Dust free and haze free
- | Requires only one watering
- | Four colours: Beige, Grey, Black and Ivory

**Coverage:**

Colour	Narrow Joints	Wide Joints
Beige, Grey, Ivory 50 lb bag	65-85 sqft	22-42 sqft
Black 50 lb bag	58-76 sqft	20-38 sqft

**Alliance Gator Natural Look Sealer**

- | Water-based
- | Zero gloss finish
- | Multi purpose
- | Rain safe after 24 hours

**Coverage:**

Size	Area
3.78 L / 1 U.S. gal.	175 sqft
18.9 L / 5.28 U.S. gal.	875 sqft

\*Please refer to Sands & Sealers on pages 190-202 for more detailed information.

Unsure of bonded vs. unbonded product recommendations? Please contact your Unilock Territory Manager for more information.