

# BEACON HILL™ SMOOTH 60mm

ENDURACOLOR™




ALMOND GROVE FUSION  
*NOT AVAILABLE IN SLAB*



FOSSIL



GRANITE MIST

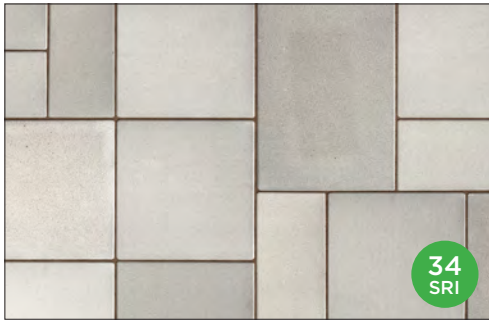

OPAL BLEND



TUSCANY



DARK BROWN **NEW**  
*Small rectangle bundle only*



MIDNIGHT CHARCOAL  
*Small rectangle bundle only*



OPAL BLEND  
*Small rectangle bundle only*

34  
SRI

44  
SRI

34  
SRI

## VISUAL APPEARANCE

Flat surface texture for a sleek, modern look with a contemporary colour palette.

## FINISH

Smooth with Enduracolor™ finish.

## PRODUCT SPECIFICATIONS




**LARGE RECTANGLE**  
15 x 22½ x 2⅜"  
380 x 570 x 60mm



**SQUARE**  
15 x 15 x 2⅜"  
380 x 380 x 60mm



**SMALL RECTANGLE**  
7½ x 15 x 2⅜"  
190 x 380 x 60mm



**SLAB**  
22½ x 37½ x 2⅜"  
570 x 950 x 60mm  
*See Slabs section page 94 for more details.*



**SMALL RECTANGLE BUNDLE**  
7½ x 15 x 2⅜"  
190 x 380 x 60mm  
*Only available in Dark Brown, Midnight Charcoal and Opal Blend.*

3 UNIT RANDOM BUNDLE


\*Colour selection should be chosen from actual samples.

EDGE DETAILS





ROUNDED EDGE

BUNDLE CONFIGURATION



LAYING PATTERNS



BHF RANDOM A

40% Large Rectangle, 40% Square, 20% Small Rectangle

BHF RANDOM B

40% Large Rectangle, 40% Square, 20% Small Rectangle

TECHNICAL INFORMATION

ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units

Conforms to:

- C140 for Absorption 4% avg - 5% max
  - C140 for Compressive Strength > 8,000 PSI avg.
  - C1645 for Freeze-thaw Durability
  - C418 for Abrasion Durability
  - Dimensional Accuracy +/- 3mm
- Test results available upon request

Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines

SOLAR REFLECTIVE INDEX (SRI) TESTING DETAILS

Product	Solar Reflectance	SRI
Opal Blend	0.32	34 <span style="color: green;">34 SRI</span>
Tuscany	0.39	44 <span style="color: green;">44 SRI</span>

TECHNICAL ADVANTAGES

ENDURACOLOR™

Refined surface and long-lasting colour

PEDESTRIAN FRIENDLY

Not recommended for vehicular

LEED INFORMATION

Materials & Resources: LEED V4:

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • 1 point
- Sourcing of Raw Materials - Leadership Extraction Practices • 1 point
- Material Ingredient Reporting - Material Ingredient Reporting • 1 point
- Material Ingredient Reporting - Material Ingredient Optimization • 1 point
- Environmental Product Declaration • 1 point

PRODUCT DATA

Stones & Bundling	Unit Thickness	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per		Lbs Per		
		Bundle	Layer	Section	Stone	Layers	Section	Unit	Layer	Bundle	Unit	Layer	Bundle	SqFt	Bundle	Layer	Section	Bundle
Fossil, Granite Mist and Midnight Charcoal manufactured in Ayr / All other colours manufactured in Pickering																		
Random Bundle		104.91	11.65	-	-	9	-	-	-	-	-	9.35	84.15	0.69	72	319.93	-	2,879.4
Large Rectangle	2 3/8" (60mm)	-	4.66	-	2.33	-	-	-	-	-	1.87	3.74	33.66	0.48	18	-	-	-
Small Rectangle	2 3/8" (60mm)	-	2.33	-	0.78	-	-	-	-	-	0.63	1.87	16.83	0.69	27	-	-	-
Square	2 3/8" (60mm)	-	4.66	-	1.55	-	-	-	-	-	1.25	3.74	33.66	0.72	27	-	-	-
Small Rectangle (Smooth only)	2 3/8" (60mm)	104.92	11.66	-	0.78	9	-	0.63	-	84.38	1.25	1.87	168.75	0.69	135	319.93	-	2,879.4
Slab	2 3/8" (60mm)	69.94	11.66	-	5.83	6	-	1.88	-	22.44	3.11	6.23	37.38	0.17	12	319.80	-	1,918.80

Notes: Sold in full bundles only on a refundable skid. Beacon Hill 60mm is not intended for vehicular applications. All measurements are nominal. Important: A urethane rubber paver mat must be used to prevent scuffing. For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

APPLICATIONS



Pedestrian



Roof Deck



\*Wall pairing suggestion- U-CARA\* - matching colour and finish

RECOMMENDED SANDS



Romex: Rompox™ ECO-Fine

Pedestrian Applications only  
Vehicular when laid on a Trass Bed

- | Ready mixed and easy to use
- | Resin film free
- | Resistant to ants, weeds, de-icing salts
- | Made from 98% natural, recycled or renewable raw materials
- | Pressure washer safe
- | Ideal for joint widths from 5mm (1/4")

Coverage:

Colour	5-6mm Joints
Beige, Stone Grey, Anthracite 55 lb bag / 1 kg can	125 sqft / 55 lb mix



Alliance - Gator G2 MAXX Sand

- | Rain safe after 15 minutes (24hr no rain if concrete overlay)
- | Sets above 32° F/ 0° C - may vary depending on weather, drainage, bedding materials and installation
- | Dust free and haze free
- | Requires only one watering

Coverage:

Colour	Narrow Joints	Wide Joints
Beige, Grey, Ivory 50 lb bag	65-85 sqft	22-42 sqft
Black 50 lb bag	58-76 sqft	20-38 sqft

RECOMMENDED SEALER



Alliance - Gator Natural Look Sealer

- | Water-based
- | Zero gloss finish
- | Multi purpose
- | Rain safe after 24 hours

Coverage:

Size	Area
3.78 L / 1 U.S. gal.	175 sqft
18.9 L / 5.28 U.S. gal.	875 sqft

\*Please refer to Sands & Sealers on pages 190-202 for more detailed information.

Unsure of bonded vs. unbonded product recommendations? Please contact your Unilock Territory Manager for more information.

