

# GRANITO™

Exclusive to **JNILOCK**

## ENDURACOLOR™




NOTTE *Random Bundle*




SABIA *Random Bundle*




SCURO *Random Bundle*

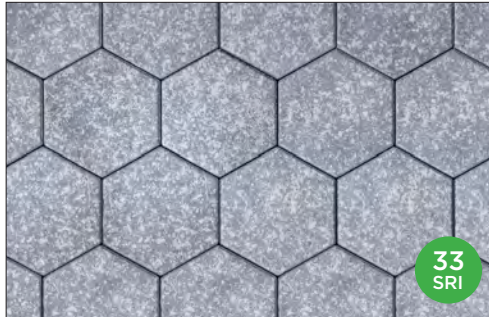

NOTTE *Hex*

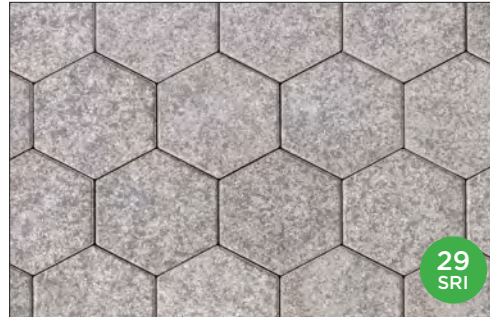

SABIA *Hex*

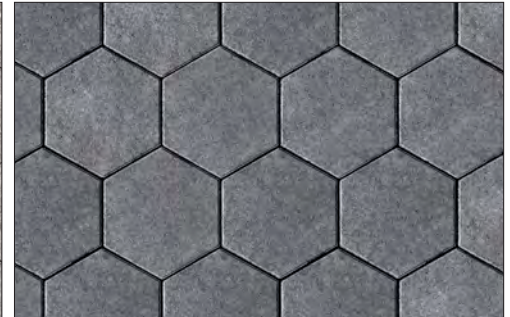

SCURO *Hex*

## VISUAL APPEARANCE

Mottled, flecked. Hex shape is a modern twist on the traditional shape.

## FINISH

Boldly mottled colour finish.

## PRODUCT SPECIFICATIONS



**LARGE RECTANGLE**  
14 x 21 x 2 $\frac{3}{8}$ "  
360 x 540 x 60mm



**SQUARE**  
14 x 14 x 2 $\frac{3}{8}$ "  
360 x 360 x 60mm



**SMALL RECTANGLE**  
7 x 14 x 2 $\frac{3}{8}$ "  
180 x 360 x 60mm



**HEX UNIT**  
8 x 8 x 2 $\frac{3}{4}$ "  
200 x 200 x 70mm  
*Sold separately*

3 UNIT BUNDLE


Random Bundle not recommended for vehicular  
Hex unit can handle vehicular loads

## EDGE DETAILS



ROUNDED EDGE

## BUNDLE CONFIGURATION



\*Colour selection should be chosen from actual samples.

**TECHNICAL INFORMATION**

**ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units**



Conforms to:

- C140 for Absorption 5% avg - 7% max
- Compressive Strength > 7,200 PSI avg.
- C67 for Freeze-thaw Durability
- C418 for Abrasion Durability
- Dimensional Accuracy **+/- 3mm**

Test results available upon request

**Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines**

**SOLAR REFLECTIVE INDEX (SRI) TESTING DETAILS**

Product	Solar Reflectance	SRI
Notte	0.31	33 
Sabia	0.28	29 

**LEED INFORMATION**

**Materials & Resources: LEED V4:**

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • **1 point**
- Sourcing of Raw Materials - Leadership Extraction Practices • **1 point**
- Material Ingredient Reporting - Material Ingredient Reporting • **1 point**
- Material Ingredient Reporting - Material Ingredient Optimization • **1 point**
- Environmental Product Declaration • **1 point**

**TECHNICAL ADVANTAGES**

**ENDURACOLOR™**

Refined surface and long-lasting colour



Factory sealed for integral stain resistance

**ARTISTA™**

Boldly mottled colour finish

Random Bundle not recommended for vehicular  
Hex unit can handle vehicular loads

**PRODUCT DATA**

Stones & Bundling	Unit Thickness	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per	
		Bundle	Layer	Section	Stone	Layers	Sections	Unit	Section	Bundle	Unit	Section	Bundle	SqFt	Layer	Bundle	Layer	Bundle
<b>Pickering Manufacturing</b>																		
Random Bundle	2 3/8" (60mm)	94.20	10.47	-	-	9	-	-	-	-	0.99	-	79.45	0.76	-	72	287	2,584
Large Rectangle	2 3/8" (60mm)	-	-	-	2.09	-	-	-	-	-	1.75	-	31.80	0.48	-	18	-	-
Square	2 3/8" (60mm)	-	-	-	1.40	-	-	-	-	-	1.18	-	31.90	0.72	-	27	-	-
Small Rectangle	2 3/8" (60mm)	-	-	-	0.70	-	-	-	-	-	0.60	-	15.75	1.43	-	27	-	-
Hex Paver	2 3/4" (70mm)	73.92	9.24	-	0.42	8	-	-	-	-	-	-	2.60	24	192	306.25	2,450	

Notes: Sold in full bundles only on a refundable skid. **Minimum quantities apply on custom orders.** All measurements are nominal. **Important: A urethane rubber paver mat must be used to prevent scuffing.** For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

**APPLICATIONS**



Pedestrian



Residential Vehicular (Hex only)



Commercial Vehicular (Hex only)



\*Wall pairing suggestion- U-CARA\*

**RECOMMENDED SANDS**



**Romex: Rompox™ ECO-Fine**

Pedestrian Applications only  
Vehicular when laid on a Trass Bed

- | Ready mixed and easy to use
- | Resin film free
- | Resistant to ants, weeds, de-icing salts
- | Made from 98% natural, recycled or renewable raw materials
- | Pressure washer safe
- | Ideal for joint widths from 5mm (1/4")

**Coverage:**

Colour	5-6mm Joints
Beige, Stone Grey, Anthracite 55 lb bag / 1 kg can	125 sqft / 55 lb mix



**Romex: Rompox™ D1**

Heavy Duty Vehicular Applications

- | Light to medium vehicle rated
- | Increased pouring capacity that is self-compacting and water emulsifiable
- | Resistant to ants, weeds, de-icing salts
- | Pressure washer safe
- | Ideal for joint widths from 3mm (1/8")
- | Ideal for driveways, parking spaces and all vehicular loading applications up to 7.5 T
- | Three colours: Neutral, Stone Grey and Basalt

**Coverage:**

Colour	6mm Joints
Neutral, Stone Grey, Basalt Two 1.5 L bottles to me be mixed with one 55 lb bag of Romex approved sand	25 sqft / 55 lb mix (based on 1,000 sqft)



**Alliance Gator G2 MAXX Sand**

- | Rain safe after 15 minutes (24hr no rain if concrete overlay)
- | Sets above 32° F/ 0° C - may vary depending on weather, drainage, bedding materials and installation
- | Dust free and haze free
- | Requires only one watering
- | Four colours: Beige, Grey, Black and Ivory

**Coverage:**

Colour	Narrow Joints	Wide Joints
Beige, Grey, Ivory 50 lb bag	65-85 sqft	22-42 sqft

**RECOMMENDED SEALER**



**Alliance Gator Natural Look Sealer**

- | Water-based
- | Zero gloss finish
- | Multi purpose
- | Rain safe after 24 hours

**Coverage:**

Size	Area
3.78 L / 1 U.S. gal.	175 sqft
18.9 L / 5.28 U.S. gal.	875 sqft

\*Please refer to Sands & Sealers on pages 190-202 for more detailed information.

Unsure of bonded vs. unbonded product recommendations? Please contact your Unilock Territory Manager for more information.

